

PULSAFEEDER®

Pulsafeeder Double Wall Dual Containment Tanks are designed for chemical feed and water treatment applications. All tanks include standard access openings and threaded connections making these tanks ready to place in service as equipped. Tanks quarter turn lid attached to tank with chemical resistant lanyard for visual inspection and no risk of losing lid. The heavy duty tank lid will support metering pump or mixer mounted directly to tank and the quick fill tank fill assembly with cap allows tanks to easily be refilled. The pump pick-up tube port allows installing the pump suction line with check valve quick and easy and once installed it is sealed from outside environment in seconds.

All of our tanks meet or exceed the EPA's requirements for secondary containment under 40-CFR 264.175. Standard Openings – 8" (16" on 300 gallon and up) Twist Lid, 2" & 1" female NPT top connections (plugged).

The linear polyethylene construction offers superior chemical resistance for acids, caustics, sodium hypochlorite, biocides, etc and handles aggressive applications that stainless steel and crosslink polyethylene will not. Double Wall Containment Tanks heavy duty dual walled construction is rated for liquids of 1.5 or 2.0 specific gravity and reduces likelihood of spills.

Features

- Heavy Duty Dual Walled Construction
- Tank sizes from 15 to 500 gallon
- Meets or Exceeds EPA's Secondary Containment Standards
- Linear Polyethylene Construction
- Quick Fill Tank Fill Assembly With Cap

Operating Benefits

- Simple Installation.
- Improved Employee Safety
- No Drum Disposal Costs
- Continuous Chemical Feed
- Simplified Chemical Handling



Aftermarket

- Water Meters
- Gauges
- Dampeners
- Metering Pumps
- Pressure Relief Valves
- KOPkits
- Mixers (Bracket, Clamp, Flanged, Thread Mount)



Double Wall Containment Tank

Double Wall Containment Tank

Specifications and Model Selection


Size Gallons	Material	Lid / Cover Type	Pump Mounting Options	Part Number
15	Blue PE	4" Fill Cap	None	42403
20				42404
40		8" Fill Cap	Top Mount	42405
62				42406
120				42407
220				42408
300				42409
500				16" Fill Cap

Typical Installations



Typical Top Configuration

Some sizes vary.

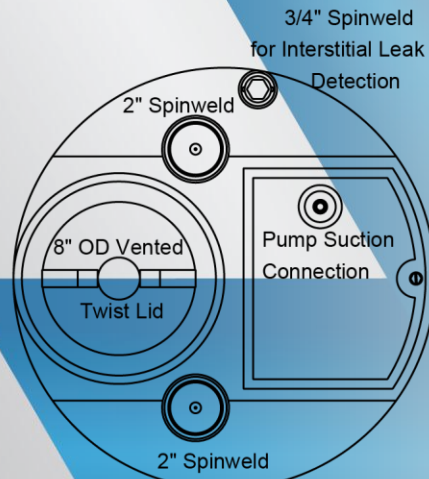

Dimensions

Size	Height	Diameter	Part Number
15	25.25"	19.5"	42403
20	23"	23.25"	42404
40	40.5"	23.25"	42405
62	38.25"	25"	42406
120	47"	32"	42407
220	47"	48"	42408
300	60"	48"	42409
500	61"	60"	42410



27101 Airport Road
 Punta Gorda, FL 33982
 Phone: ++1(941) 575-3800
 Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

DCT001 I14

